MATTHEWS

PRODUCT CATALOG Volume III







MATTERS

Matthews' fans achieve some of the highest efficiency ratings in the industry through:

- DC Motor technology allows for large, powerful blades which provide more robust airflow and ultra-quiet operation.
- Rotational fans reduce HVAC costs by mixing ambient air more thoroughly.
- Directional and Wall fans provide columnar airflow which can be customized.

Matthews does not field destroy

• 95% of damaged and defective materials are recycled or re-purposed.

Matthews achieves low defect rates because:

- All fans are visually inspected before shipping.
- All rotational and oscillating fans are bench tested before shipping.

MATTHEWS FAN COMPANY PRODUCTS



Dagny LK pg. 14-15



Dana pg. 16-17



Irene-3 pg. 26-27

Irene-3H pg. 28-29



Kaye pg. 38-39



Laura pg. 40-41



Nan pg. 50-51



Super Janet pg. 58-59

MATTHEWS-GERBAR



Ar Ruthiane pg. 60-61



Bianca Directional pg. 62-63



Brisa 2000 pg. 64-65



Bruna Parede pg. 66-67



Duplo-Dinamico pg. 68-69



Italo Ventania pg. 70-71



Jarold Direcional pg. 72-73



Michelle Parede pg. 74-75



Vent-Bettina pg. 76-77



The Acqua 360° rotational fan is thoughtfully designed to resemble the molecular structure of water, Earth's most precious resource. The Acqua offers fluid lines and quiet axial rotation. Its fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews rotational fans circulate heat and air-conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum and heavy stamped steel, the Acqua carries a limited lifetime warranty.

















Product Features















ACQUA

FINISH AND BLADE OPTIONS		
SKU#	AQ-XX-XXXX (Model+Finish+Blade)	
Standard Finishes	Matte Black Textured Bronze	BK TB
Blade Styles and Material	Solid Wood / Barn Wood Solid Wood / Mahogany Solid Wood / Matte Black Metal w/ Decorative Cage Metal w/ Safety Cage	WDBW WD WDBK MTL MSAF
TECHNICAL SPECS		

TECHNICAL SPECS		
Fan Weight	27 lbs	
Voltage	110 or 220	
Motor Type	AC	
Rotation	Yes	
Downrods Lengths <i>Field cuttable.</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	1 inch	
Overall Drop	16 inches / 41 cm + downrod length	
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White Noise	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		
Fan Head Options	Solid Wood	Metal with Guard
Fan Diameter	39 inches / 99 cm	37 inches / 94 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Safety Cage or Decorative Cage
RPM (Low / High)	721 / 1199	1040 / 1445
CFM (Low / High)	2750 / 4058	1825 / 3167
Watts (High)	101.25	80.50
CFM/Watt (High)	40.80	39.34
Blade Pitch	19°	31°

LIGHT KIT PHOTOMETRICS		
Lamping (Replaceable)	GU10 LED	
Remote Dimmable	No	
Delivered Temperature in K	2969	
Delivered Lumens	337.30	
CRI	94	
Watts	5	
Hours	36,000	

Light kit longevity if used 6 Hours/Day: 16.5 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm $\,$

Slant ceiling canopy for up to 29°


Black 3-speed RF remote control with reverse





ACCESSORIES

60° cathedral ceiling canopy

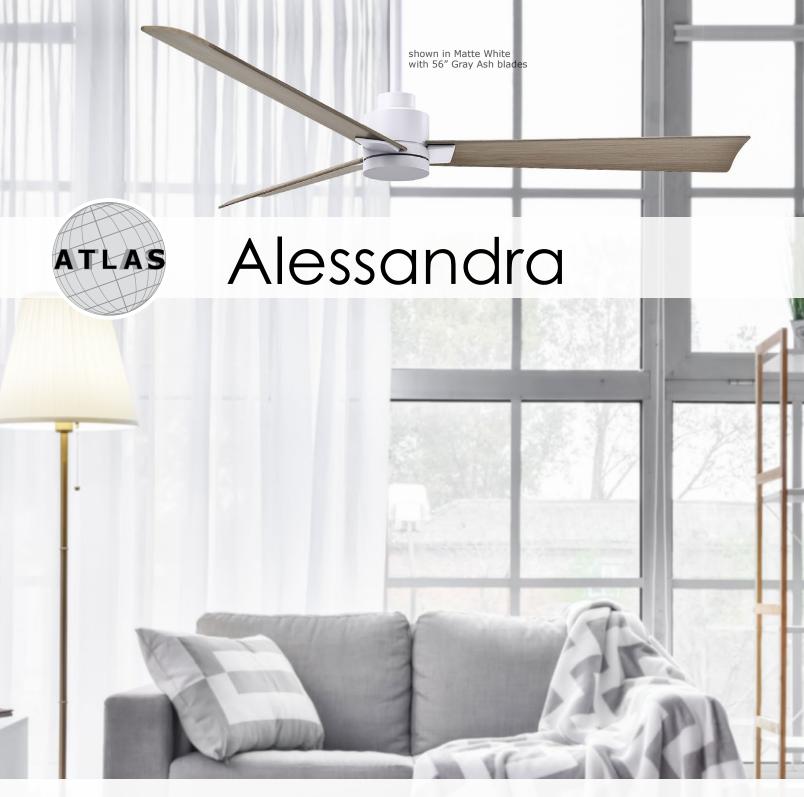

Minimal form with maximum efficiency. With a wide range of blade sizes, the Alessandra can accommodate any space. This thoughtfully crafted and versatile fan will complement any aesthetic and improves the health and comfort of any room. Highly customizable, the Alessandra is available in five different body finishes, seven blade options, and even an option with a CCT light kit as the Alessandra-LK. Suitable for wet locations. Backed by a limited lifetime warranty, our fans are of the highest quality and will dutifully perform for years to come. Constructed of cast aluminum and heavy stamped steel, the Alessandra has a limited lifetime warranty.


















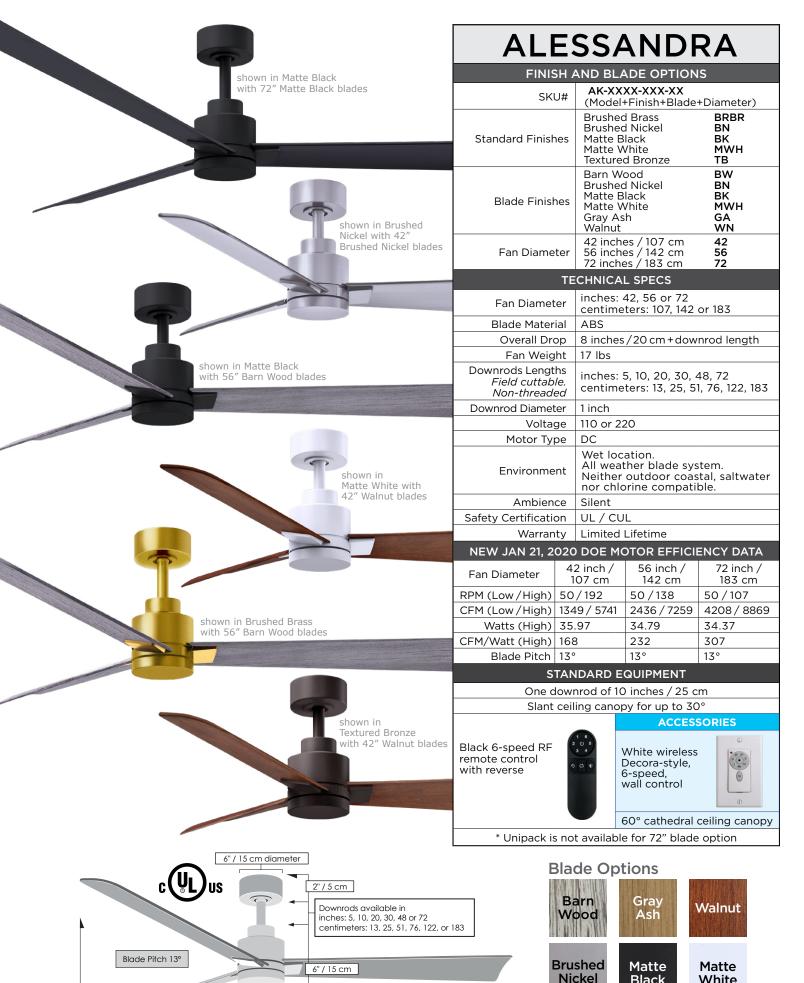

42", 56" or 72" / 107 cm, 142 cm or 183 cm

White

Black




Minimal form with maximum efficiency. With a wide range of blade sizes, the Alessandra-LK can accommodate any space. This thoughtfully crafted and versatile fan will complement any aesthetic and improves the health and comfort of any room. Highly customizable, the Alessandra-LK is available in five different body finishes, seven blade options, and a dimmable 2700K-6500K CCT light kit. Suitable for damp locations. Backed by a limited lifetime warranty, our fans are of the highest quality and will dutifully perform for years to come. Constructed of cast aluminum and heavy stamped steel, the Alessandra-LK has a limited lifetime warranty.







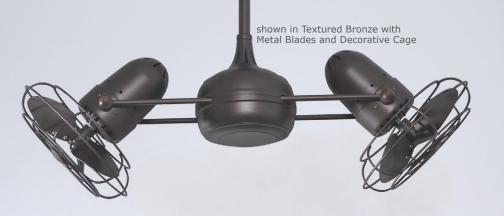



Dagny



The double-headed 360° rotational fan, Dagny, with cylindrical central housing and straight, parallel arms, is designed in the retrospective aesthetic. The Dagny offers smooth and quiet axial rotation. Its fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews rotational fans circulate heat and air-conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum and heavy stamped steel, the Dagny carries a limited lifetime warranty. The Dagny is also available with a light kit as the *Dagny-LK*.























2 CONTRACTOR OF THE PARTY



DAGNY				
FINISH	AND B	LADE OPT	IONS	
SKU#	DG-XX- (Model	-XXXX +Finish+Blac	de)	
Standard Finish	Texture Matte E	d Bronze Black		TB BK
Blade Styles and Material	Solid W Solid W Metal w	/ood / Barn /ood / Maho /ood / Matte v/ Decorative v/ Safety Cag	gany Black Cage	WDBW WD WDBK MTL MSAF
TI	ECHNIC	AL SPECS		
Fan Weight	22 lbs			
Voltage	110 (Co	ntact us for :	220 cor	version)
Motor Type	AC			
Rotation	Yes			
Downrods Lengths Field cuttable, Non-Threaded		: 5, 10, 20, 3 leters: 13, 25		
Downrod Diameter	1 inch			
Overall Drop	14 inch	es / 36 cm +	downro	od length
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.			
Ambience	Soothing White Noise			
Safety Certification	UL / CUL			
Warranty	Limited Lifetime			
NEW JAN 21, 202	1 30d 0	MOTOR EFF	ICIENC	Y DATA
Fan Head Options	Solid Wood		Metal	with Guard
Fan Diameter	41 inch	es / 104 cm	39 incl	hes / 99 cm
Fan Blade Diameter	16 inch	es / 41 cm	13 inch	nes / 33 cm
Guard Options	No Cag	ge Option		Cage or ative Cage
RPM (Low / High)	1012 / 1445		1035 /	1448
CFM (Low / High)	2565 / 4168		2199 /	3169
Watts (High)	87.26		80.69	
CFM/Watt (High)	50		42	
Blade Pitch	19°		31°	
STANDARD EQUIPMENT				
One dov	wnrod of	10 inches /	25 cm	
Slant ce	eiling car	nopy for up t	o 29°	
Black 3-speed RF re control with reve		ACC	ESSOF	RIES
		Decora-sty 3-speed, non-dimma wall contro	ble	2 1

60° cathedral ceiling canopy



With clean, fluid lines, the Dagny LK 360° rotational fan is a striking centerpiece in any space. Its movement about its cylindrical center housing is smooth and quiet. Dagny LK's dual fan heads can be infinitely positioned in 180-degree arcs for optimum and customized air movement. As the angle between the fan heads and the horizontal support rods is increased, so does the speed of Dagny LK's axial rotation. Matthews rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed from cast aluminum and heavy stamped steel, the Dagny LK carries a limited lifetime warranty. This model is also available without a light kit as the *Dagny*.

Product Features



























DAGNY LK

FINISH AND BLADE OPTIONS		
SKU#	DGLK-XX-XXXX (Model+Finish+Blade)	
Standard Finishes	Brushed Nickel Matte Black Textured Bronze	BN BK TB
Blade Styles and Material	Solid Wood / Barn Wood Solid Wood / Mahogany Solid Wood / Matte Black Metal w/ Decorative Cage Metal w/ Safety Cage	WDBW WD WDBK MTL MSAF
TECHNICAL SPECS		

1	ECHNICAL SPECS
Overall Drop	14 inches / 41 cm + downrod length
Fan Weight	22 lbs
Voltage	110 (Contact us for 220 conversion)
Motor Type	AC
Rotation	Yes
Downrods Lengths Field cuttable, Non-Threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime
NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA	

11211 07 111 21, 202		10121101 271171
Fan Head Options	Solid Wood	Metal with Guard
Fan Diameter	41 inches / 104 cm	39 inches / 99 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Safety Cage or Decorative Cage
RPM (Low / High)	757 / 1256	1069 / 1442
CFM (Low / High)	2557 / 4171	1844 / 3067
Watts (High)	87.36	80.50
CFM/Watt (High)	50	39
Blade Pitch	19°	31°

LIGHT KIT PHOTOMETRICS		
Lamping (Replaceable)	Integrated LED	
Remote Dimmable	Yes	
Delivered Temperature in K	2969	
Delivered Lumens	523.7	
CRI	90	
Watts	18	
Hours	50,000	

Light kit longevity if used 6 Hours/Day: 22.8 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 29°

Black 3-speed RF remote control with reverse




ACCESSORIES

Decora-style, 3-speed, non-dimmable wall control



60° cathedral ceiling canopy

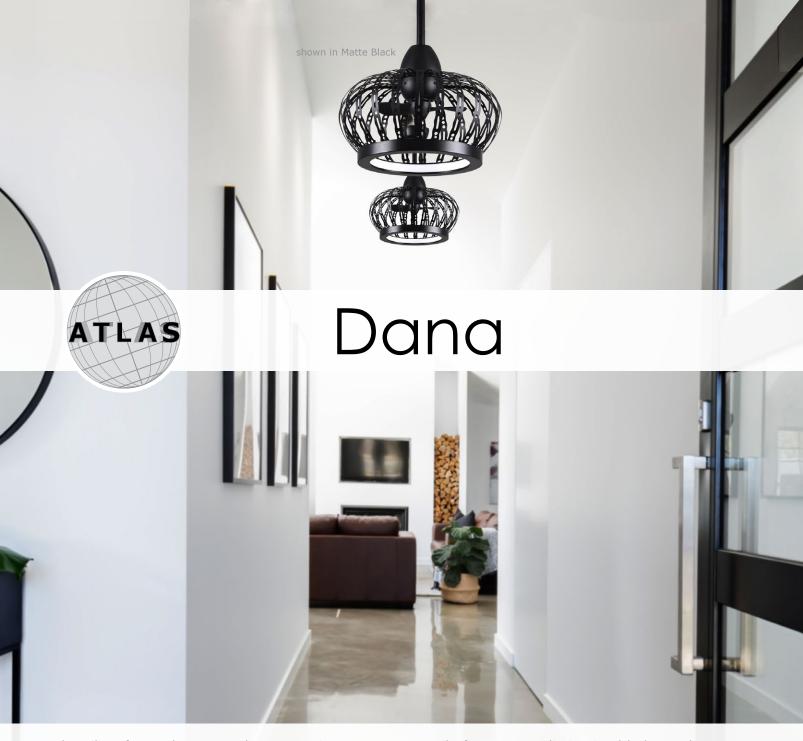

Both ceiling fan and LED pendant, Dana is our most versatile fixture. Her diminutive blades and LED light kit are concealed by intricate, organically inspired metal work finished in Matte Black, Matte White, Brushed Bronze, or Brushed Brass. Constructed of cast aluminum and heavy stamped steel, the Dana carries a limited lifetime warranty.























Product Features








Dimmable Lamp





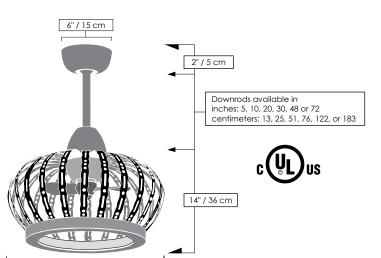

20" / 51 cm

DANA FINISH AND BLADE OPTIONS DM-XXXX SKU# (Model+Finish) **Brushed Brass** BRBR Standard **Brushed Bronze BB Finishes** Matte Black BK Matte White **MWH TECHNICAL SPECS** Fan Diameter 20 inches / 51 cm Blade Material Rubber 16 inches / 41 cm + downrod length Overall Drop Fan Weight 23 lbs Voltage 110 or 220 Motor Type AC **Downrods Lengths** inches: 5, 10, 20, 30, 48, 72 Field cuttable, centimeters: 13, 25, 51, 76, 122, 183 Non-Threaded **Downrod Diameter** 1 inch Damp locations for all finishes. Environment Neither coastal, saltwater nor chlorine compatible. Ambience Soothing White Noise Safety Certification UL / CUL Warranty Limited Lifetime NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA RPM (Low / High) 1095 / 1666 CFM (Low / High) 691 / 1100 Watts (High) 32 CFM/Watt (High) 42 Blade Pitch 31° LIGHT KIT PHOTOMETRICS Integrated LED Lamping (Replaceable) Remote Dimmable Yes Delivered Temperature in K 2923 **Delivered Lumens** 578 CRI 93.8 24 Watts Hours 49,000 Light kit longevity if used 6 Hours/Day: 22.4 Years STANDARD EQUIPMENT One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 29°

Light cover

Black 3-speed RF remote control with reverse

ACCESSORIES

Decora-style, 3-speed, non-dimmable wall control



60° cathedral ceiling canopy



The Diane directional fan head provides maximum airflow with a sweeping 90° forward and reverse oscillation. The Diane can be hung in small, awkward spaces or in front of HVAC ducts to improve the efficiency of heating, ventilation or air conditioning of any space. Constructed of cast aluminum and heavy stamped steel, the Diane carries a limited lifetime warranty.

































DIANE FINISH AND BLADE OPTIONS DI-XX-XXXX SKU# (Model+Finish+Blade) **Brushed Nickel** BK Matte Black Standard Finishes CR Polished Chrome **Textured Bronze** TB Solid Wood/Barn Wood **WDBW** Solid Wood/Mahogany WD **Blade Styles** Solid Wood/Matte Black WDBK and Material Metal w/ Decorative Cage MTL Metal w/ Safety Cage **MSAF TECHNICAL SPECS** Fan Weight 12 lbs Voltage 110 or 220 Motor Type AC Oscillation **Downrods Lengths** inches: 5, 10, 20, 30, 48, 72 Field cuttable. centimeters: 13, 25, 51, 76, 122, 183 Non-threaded Downrod Diameter 1 inch Metal 14 inches / 36 cm + downrod length Blades Overall Drop Wood 12 inches / 30 cm + downrod length Blades Damp locations for all finishes. Environment Neither coastal, saltwater nor chlorine compatible. Ambience Soothing White Noise ETL / CETL Safety Certification Warranty Limited Lifetime NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA Fan Head Options Solid Wood Metal with Guard Fan Diameter 16 inches / 41 cm 13 inches / 33 cm Fan Blade Diameter 16 inches / 41 cm 13 inches / 33 cm Decorative Cage **Guard Options** No Cage Option or Safety Cage RPM (Low / High) 865 / 1325 900 / 1377 CFM (Low / High) 1441 / 2152 1068 / 1345 Watts (High) 51.37 46.14 CFM/Watt (High) 31 44 31° Blade Pitch 19° STANDARD EQUIPMENT One downrod of 10 inches / 25 cm Vaulted ceiling canopy for up to 29° **ACCESSORIES** Decora-style, Black 3-speed 3-speed wall RF remote control in control white

60° cathedral ceiling canopy



equipped with all weather blades and 16W LED dimmable light kit with optional metal cover. Constructed of entirely 316 marine grade stainless steel, the Donaire carries a limited lifetime warranty.


































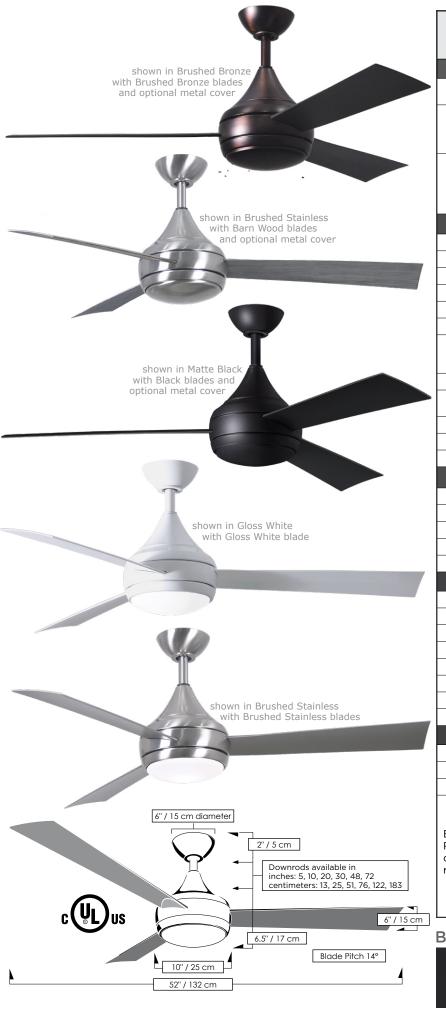

DONAIRE

FINISH AND BLADE OPTIONS		
SKU#	DA-XX-XX (Model+Finish+Blad	e)
Standard Finishes	Matte Black Brushed Bronze Brushed Stainless Gloss White	BK BB BS WH
Blade Finish	Black Barn Wood Tone Brushed Bronze Brushed Stainless Gloss White	BK BW BB BS WH
TECHNICAL SPECS		
Fan Diameter	52 inches / 132 cm	
Blade Material	ABS	
Overall Drop	8.5 inches / 22 cm + d	lownrod length

Fan Weight	29 lbs
Voltage	110 or 220
Motor Type	AC
Downrods Lengths Field cuttable, Non-Threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
	Caratal and wat larations

Environment	Coastal and wet locations. All weather blade system.
Ambience	Silent
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		
RPM (Low / High)	55 / 172	
CFM (Low / High)	1775 / 6013	
Watts (High)	58.62	
CFM/Watt (High)	111	

Blade Pitch 14°

Hours

LIGHT KIT PHOTOMETRICS			
	Lamping (Replaceable)	Integrated LED	
	Remote Dimmable	Yes	
	Delivered Temperature in K	3017	
	Delivered Lumens	725	
	CRI	90	
	Watts	16	

Light kit longevity if used 6 Hours/Day: 27.4 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 29°

Light cover

Black 3-speed RF remote control with reverse



ACCESSORIES

60,000

Decora-style, 3-speed, non-dimmable wall control



60° cathedral ceiling canopy

Blade Options







Gloss White



Designed by Chicago architect Stephen Katz in 2013, the wet location Eliza blends a beautiful technically derived form with superior function and movement. The unique blade shape is designed to maximize air movement at the outer edge of the blade. The result is more efficient air velocity rings, less blade drag and greater motor optimization. Equally important is Eliza's stationary visual statement which combines modern utility with minimalist geometry. Constructed of cast aluminum and heavy stamped steel, the Eliza has a limited lifetime warranty.




















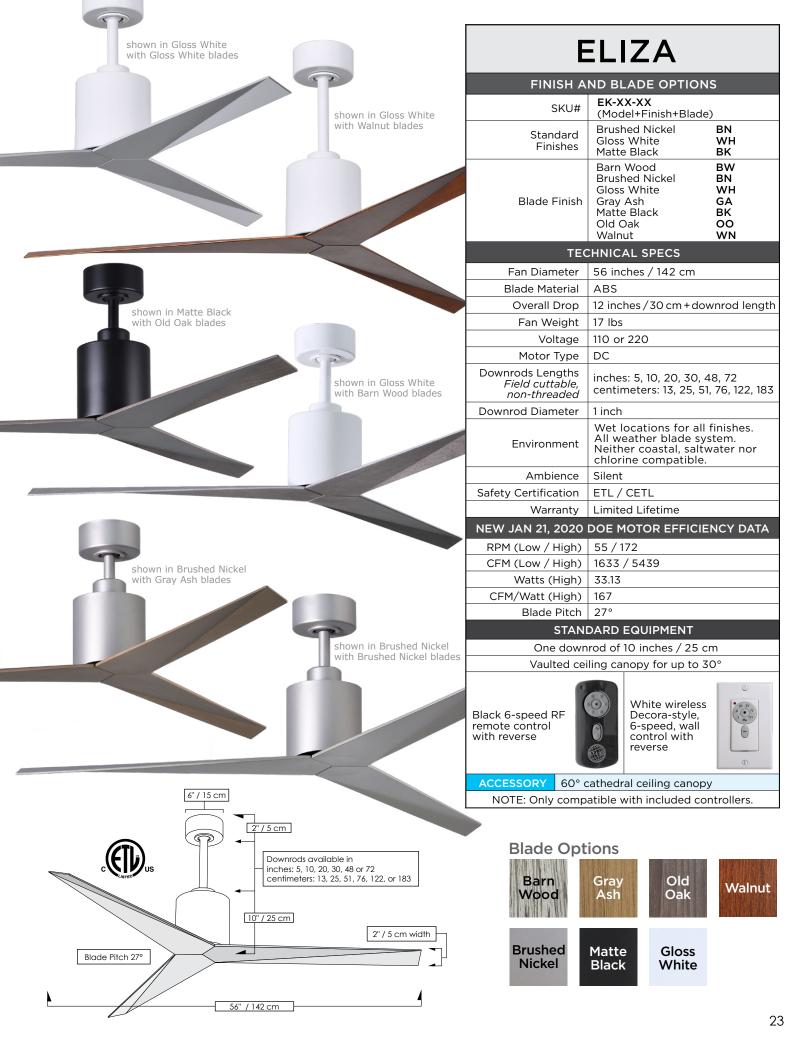




Designed by Chicago architect Stephen Katz in 2014, the Eliza-H ceiling-mount fan blends a beautiful technically derived form with superior function and movement. The unique blade shape is designed to maximize air movement at the outer edge of the blade. The result is more efficient air velocity rings, less blade drag and greater motor optimization. Equally important is Eliza-H's stationary visual statement which combines modern utility with minimalist geometry. Constructed of cast aluminum and heavy stamped steel, the Eliza-H has a limited lifetime warranty.





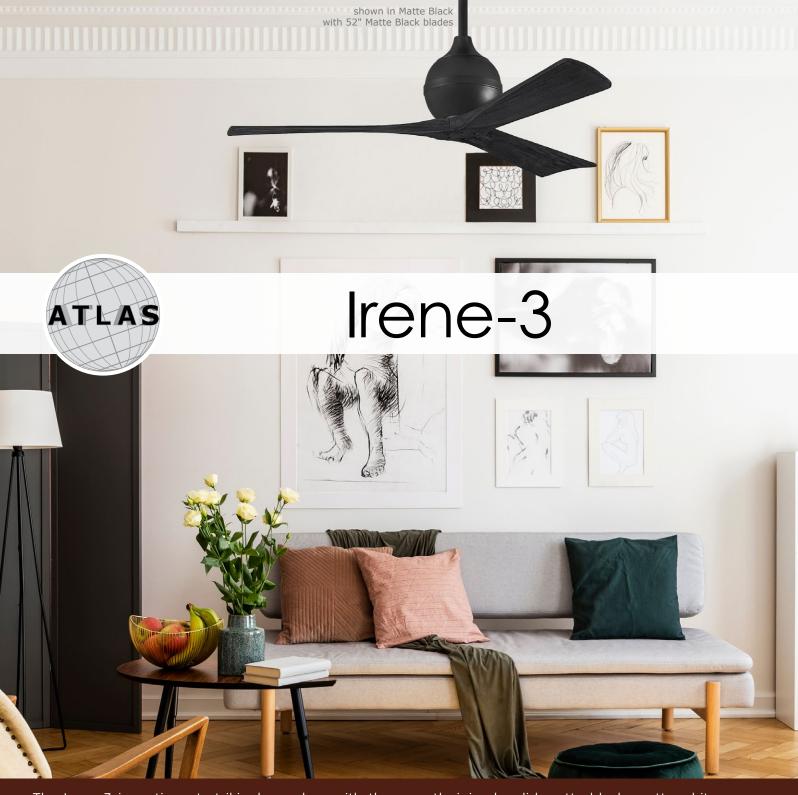

The Irene-3 is rustic, yet strikingly modern with three neatly joined, solid matte black, matte white, walnut, or barn wood tone blades. A spherical motor housing complements its minimal profile. Irene-3 is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-3 has a limited lifetime warranty.

- Product Features




















The Irene-3H ceiling-mount fan is rustic, yet strikingly modern with three neatly joined, solid wood matte black, matte white, walnut, or barn wood tone blades. A cylindrical motor housing complements its minimal profile. Irene-3H is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-3H has a limited lifetime warranty.







The Irene-3HLK ceiling-mount fan is rustic, yet strikingly modern with three neatly joined, solid wood matte black, matte white, walnut, or barn wood tone blades. A cylindrical motor housing complements its minimal profile. Irene-3HLK is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-3HLK has a limited lifetime warranty.





IRENE-3HLK

FINISH A	AND BLADE	OPTIONS

FINISH AND BLADE OPTIONS		
SKU#	SKU# IR3HLK-XXXX-XXX (Model+Finish+Blade+Diameter)	
Standard Finishes	Barn Wood Brushed Brass Brushed Bronze Brushed Nickel Brushed Pewter Light Maple Gloss White Matte Black Polished Chrome Textured Bronze Walnut	BW BR BB BB BB BP LWH BC FB CFB W
Blade Finishes	Barn Wood Tone Matte Black Matte White Walnut Tone	BW BK MWH WA
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60

TECHNICAL SPECS

Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152
Blade Material	CNC Cut Solid Wood
Overall Drop	12 inches/30 cm
Fan Weight	12 lbs
Voltage	110 or 220
Motor Type	DC
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.
Ambience	Silent
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	42 inch / 107 cm	52 inch / 132 cm	60 inch / 152 cm
RPM (Low/High)	50 / 232	51 / 212	51 / 152
CFM (Low/High)	701 / 3573	1057 / 5047	1783 / 5878
Watts (High)	17.61	32.49	30.81
CFM/Watt (High)	168	149	191
Blade Pitch	15°	15°	15°

LIGHT KIT PHOTOMETRICS

Lamping (Replaceable)	Integrated LED	
Remote Dimmable	Yes	
Delivered Temperature in K	3075	
Delivered Lumens	690	
CRI	90	
Watts	16	
Hours	60,000	

Light kit longevity if used 6 Hours/Day: 27.4 Years

STANDARD EQUIPMENT

Light Cover

White wireless Decora-style, 6-speed, wall control with reverse



NOTE: Only compatible with included controllers.








The Irene-5 is rustic, yet strikingly modern with five neatly joined, solid wood matte black, matte white, walnut, or barn wood tone blades. A spherical motor housing complements its minimal profile. Irene-5 is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-5 has a limited lifetime warranty.



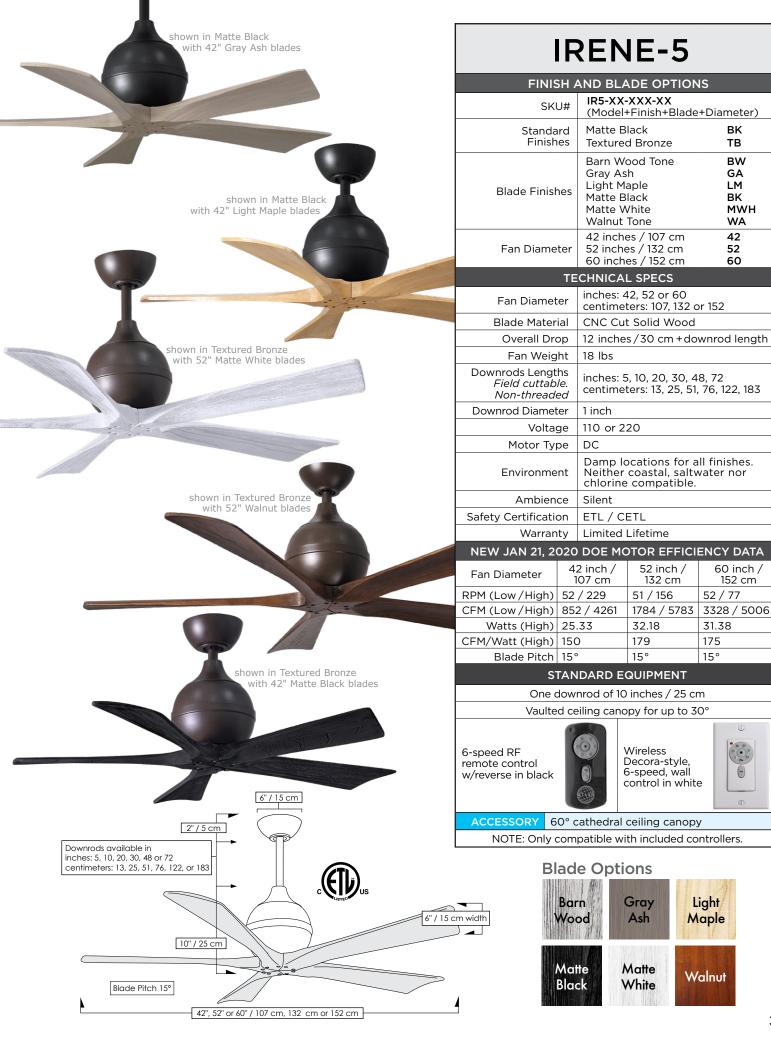



The Irene-5H ceiling-mount fan is rustic, yet strikingly modern with five neatly joined, solid wood, matte black, matte white, gray ash, light maple, walnut, or barn wood tone blades. A cylindrical motor housing complements its minimal profile. Irene-5H is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-5H has a limited lifetime warranty.







42", 52" or 60" / 107 cm, 132 cm or 152 cm



The Irene-5HLK ceiling-mount fan is rustic, yet strikingly modern with five neatly joined, solid wood matte black, matte white, walnut, or barn wood tone blades. A cylindrical motor housing complements its minimal profile. Irene-5HLK is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-5HLK has a limited lifetime warranty.







The beautiful Kaye 3-speed versatile-mount, wall or ceiling fan, oscillates left to right, forward and reverse, in a 90° sweep. Its design is reminiscent of vintage train cabin ventilators of yester-year, and will cool down your favorite space with poise and determination. Kaye's profile is low, however its strength and character define it. Kaye can be mounted in any small or awkward spaces or in front of HVAC ducts to improve the efficiency of the heating, ventilation or air conditioning of your favorite space. Constructed of cast aluminum and heavy stamped steel, the Kaye carries a limited lifetime warranty.























Product Features





KAYE

FINISH AND BLADE OPTIONS		
SKU#	KC-XX (Model+Finish)	
Finishes	Brushed Nickel Matte Black Polished Chrome Textured Bronze Gloss White	BN BK CR TB WH
TECHNICAL SPECS		

	21222 111112		
TECHNICAL SPECS			
Fan Weight	10.5 lbs		
Blade Material	Metal / ABS		
Voltage	110 or 220		
Motor Type	AC		
Oscillation	Yes		
Fan Diameter	13 inches / 33 cm		
Fan Height	13 inches / 33 cm		
Fan Projection	17.5 inches / 44 cm		
Ceiling Mount Overall Drop	17.5 inches / 44 cm		
Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling		
Fan Guard	Safety Cage		
Blade Pitch	31°		
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.		
Ambience	Soothing White Noise		
Safety Certification	ETL / CETL		
Warranty	Limited Lifetime		
NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA			
RPM (Low / High)	1213 / 1445		
CFM (Low / High)	868 / 1303		
Watts (High)	47.68		
CFM/Watt (High)	29		
Blade Pitch	31°		

STANDARD EQUIPMENT

Safety cage

Side-mounted wall junction box

White Decorastyle, 3-speed wall control



Black 3-speed RF remote control



Note:

- 1) A three-wire system is needed to operate the oscillation mechanism independent of the fan blades.
- The remote control receiver will not fit behind the wall canopy. A clever electrician will need to hide the receiver in wall or ceiling according to code.



The Laura 3-speed, left-to-right 90 degree oscillating wall fan offers the best in function. Its patented design boasts a whisper-quiet DC motor, remote control operation and easy 2-wire installation. Compact and powerful, Laura can be mounted in small, awkward spaces or in front of HVAC ducts to improve the efficiency of heating, ventilation or air conditioning. Constructed of cast aluminum and heavy stamped steel, Laura carries a limited lifetime warranty.

























LAURA

FINISH AND BLADE OPTIONS		
SKU#	LL-XX (Model+Finish)	
Finishes	Brushed Nickel Matte Black Textured Bronze	BN BK TB

TECHNICAL SPECS			
Fan Weight	12 lbs		
Blade Material	Metal / ABS		
Voltage	110 - 240		
Motor Type	DC		
Oscillation	Yes		
Fan Diameter	16 inches / 41 cm		
Fan Height	14.5 inches / 37 cm		
Fan Projection	19.5 inches / 50 cm		
Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling		
Fan Guard	Safety Cage		
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.		
Ambience	Soothing White Noise		
Safety Certification	UL / CUL		
Warranty	Limited Lifetime		
NEW JAN 21, 2020	NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		
RPM (Low / High)	1231 / 1520		
CFM (Low / High)	1056 / 1600		
Watts (High)	28.1		
CFM/Watt (High)	56.94		
Blade Pitch	31°		


STANDARD EQUIPMENT

Safety cage
Side-mounted wall junction box
Black 3-speed RF remote control

Note:

- Two-wire system required to operate the oscillation mechanism independent of the fan blades.
 Three-wire system not needed.
- 2) Receiver already hidden in motor canopy.







ATLAS Lindsay



The Lindsay ceiling fan offers a simple, yet refined air flow solution to any space. The two elegant, solid wood blades quietly circulate air as they revolve around an understated central motor housing. Integrated into the design is an eco-friendly, dimmable LED light kit which will provide illumination for decades to come. The Lindsay is available in matte black, matte white and textured bronze finishes. Blade finish options are barn wood, matte black, matte white or walnut. Constructed of cast aluminum and heavy stamped steel, Lindsay carries a limited lifetime warranty.





















LINDSAY FINISH AND BLADE OPTIONS LW-XXX-XXX SKU# (Model+Finish+Blade) Matte Black BK Standard MWH Matte White Finishes **Textured Bronze** TB Barn Wood вw Matte Black BK Blade Finish **MWH** Matte White Walnut WN **TECHNICAL SPECS** Fan Diameter 52 inches / 132 cm Blade Material CNC Cut Solid Wood 12 inches / 30 cm Overall Drop Fan Weight 11 lbs Voltage 110 (Please contact us for 220V) Motor Type Damp locations for all finishes. Environment Neither coastal, saltwater nor chlorine compatible. **Ambience** Silent Safety Certification ETL / CETL Warranty Limited Lifetime NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA RPM (Low / High) 51 / 220 CFM (Low / High) 1097 / 4955 Watts (High) 29.61 CFM/Watt (High) 166 Blade Pitch 45° LIGHT KIT PHOTOMETRICS Lamping (Replaceable) Integrated LED Remote Dimmable Yes Delivered Temperature in K 2940

Light kit longevity if used 6 Hours/Day: 16.9 Years STANDARD EQUIPMENT

Black 6-speed RF remote control with reverse



Delivered Lumens

CRI

Watts

Hours

White wireless Decora-style, 6-speed, wall control




557

93.7

17

37,000

NOTE: Only compatible with included controllers.

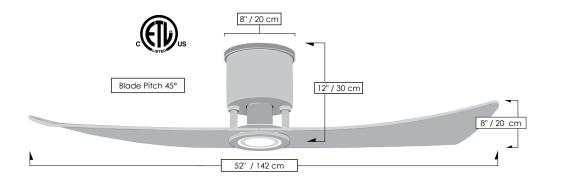

Blade Options





The oscillating Melody, 3-speed wall-mounted fan, designed in the Art Nouveau style with a grand, arching gooseneck, provides maximum multi-directional airflow with its 90° left to right sweep. Melody can be mounted in small, awkward spaces or in front of HVAC ducts to improve the efficiency of the heating, ventilation or air conditioning of any space. Constructed of cast aluminum and heavy stamped steel, the Melody carries a limited lifetime warranty.



























5.5" / 14 cm

MELODY

FINISH AND BLADE OPTIONS		
SKU#	ME-XX (Model+Finish)	
Finishes	Matte Black Textured Bronze	BK TB

TECHNICAL SPECS			
Fan Weight	14 lbs		
Blade Material	Metal / ABS		
Voltage	110 or 220		
Motor Type	AC		
Oscillation	Yes		
Fan Diameter	13 inches / 33 cm		
Fan Height	20 inches / 51 cm		
Fan Projection	20 inches / 51 cm		
Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling		
Fan Guard	Safety Cage		
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.		
Ambience	Soothing White Noise		
Safety Certification	ETL / CETL		
Warranty	Limited Lifetime		
NEW JAN 21, 2020	D DOE MOTOR EFFICIENCY DATA		
RPM (Low / High)	1213 / 1495		
CFM (Low / High)	868 / 1303		
Watts (High)	47.68		
CFM/Watt (High)	27.32		
Blade Pitch	31°		

STANDARD EQUIPMENT

Safety cage

Side-mounted wall junction box

Decora-style, 3-speed wall control in white



Black 3-speed RF remote

control



Note:

Blade Pitch 31°

20" / 51 cm

20" / 51 cm

- A three-wire system is needed to operate the oscillation mechanism independent of the fan blades.
- The remote control receiver will not fit behind the wall canopy. A clever electrician will need to hide the receiver in wall or ceiling according to code.



computer software which allowed the design to achieve a complex form. The result is a clean, natural and contemporary look perfect for any room or décor. Available in gloss white or matte black finish, Molly will complement a variety of design styles while also providing a fresh and unique, modern statement. Constructed of cast aluminum and heavy stamped steel, the Molly carries a limited lifetime warranty.


























shown in Matte Black

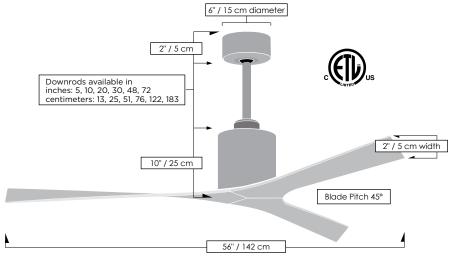

MOLLY

FINISH AND BLADE OPTIONS		
SKU#	MK-XX (Model+Finish)	
Standard Finishes	Gloss White WH Matte Black BK	
TEC	CHNICAL SPECS	
Fan Diameter	56 inches / 142 cm	
Blade Material	ABS	
Overall Drop	12 inches/30 cm+downrod length	
Fan Weight	17 lbs	
Voltage	110 (Please contact us for 220V)	
Motor Type	DC	
Downrods Lengths Field cuttable, non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	1 inch	
Environment	Wet locations for all finishes. All weather blade system. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Silent	
Safety Certification	ETL / CETL	
Warranty	Limited Lifetime	
NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		
RPM (Low / High)	49 / 116	
CFM (Low / High)	1556 / 3530	
Watts (High)	29.96	
CFM/Watt (High)	126	
Blade Pitch	45°	
STANDARD EQUIPMENT		

Vaulted ceiling canopy for up to 30°

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control



ACCESSORY 60° cathedral ceiling canopy

NOTE: Only compatible with included controllers.

One downrod of 10 inches / 25 cm

Blade Options



Gloss White



Designed by Chicago architect Stephen Katz in 2018, the Mollywood ceiling fan combines modern organic geometry with outstanding performance and function. The blade shape was developed using advanced computer software which allowed the design to achieve a complex form. The result is a clean, natural and contemporary look perfect for any room or décor. Available in matte black, matte white, or textured bronze finishes with either barn wood, matte black, matte white or walnut tone solid wood blade options. Mollywood will complement a variety of design styles while also providing a fresh and unique, modern statement. Constructed of cast aluminum and heavy stamped steel, Mollywood carries a limited lifetime warranty.

Product Features
















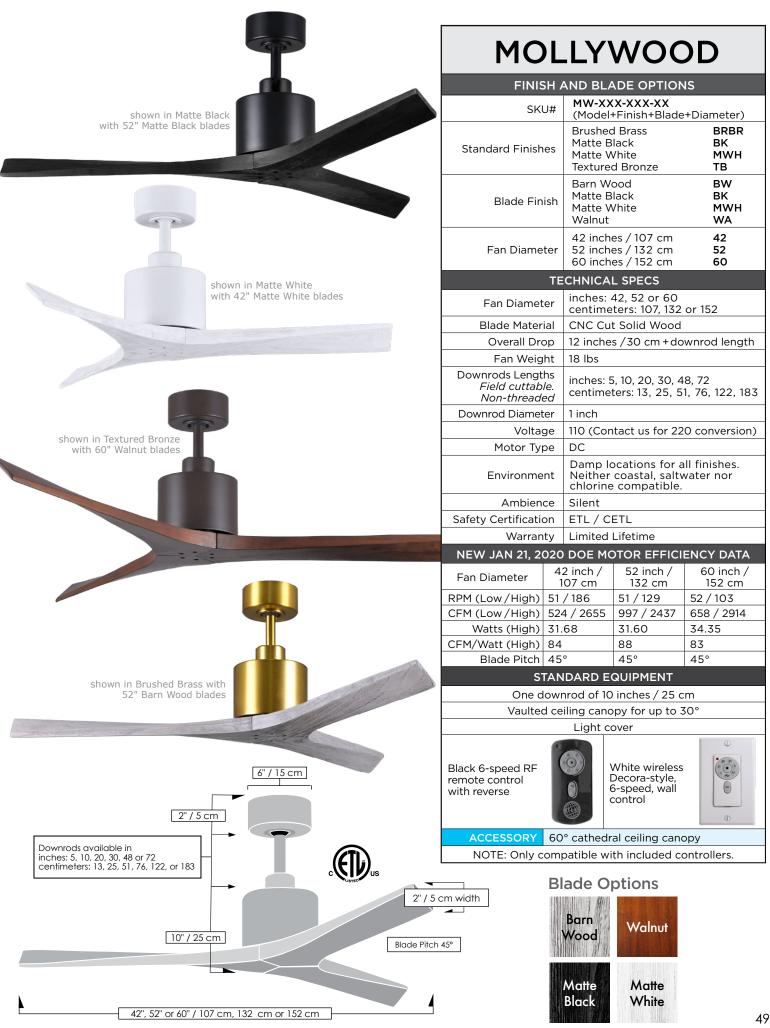





Nan



Designed by Chicago architect Stephen Katz, the Nan ceiling fan is a contemporary take on traditional fan design with superior performance and functionality. The Nan fan feels at home in any room or setting from casual to formal and everything in between. This timeless ceiling fan works in residential environments, restaurants, hospitality or even office settings. The Nan fan has the perfect amount of design presence for any size room or season. The fully adjustable fan motor speeds makes moving the right amount of air simple and easy. The Nan fan will feel like a natural part of the room and enhance any space with a fresh breeze. Also available is the larger Nan XL for larger spaces.



















NAN

FINISH AND BLADE OPTIONS NK-XXX-XXX-XX SKU# (Model+Finish+Blade+Diameter) **BRBR Brushed Brass** Matte Black BK Standard Finishes Matte White **MWH Textured Bronze** TΒ Barn Wood ВW Gray Ash GΑ Light Maple LM Blade Finish Matte Black BK Matte White **MWH** Walnut WA 42 inches / 107 cm 42 52 inches / 132 cm 60 inches / 152 cm Fan Diameter 52 60

TECHNICAL SPECS			
Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152		
Blade Material	CNC Cut Solid Wood		
Overall Drop	12 inches/30 cm +downrod length		
Fan Weight	18 lbs		
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183		
Downrod Diameter	1 inch		
Voltage	110 (Contact us for 220 conversion)		
Motor Type	DC		
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.		
Ambience	Silent		
Safety Certification	ETL / CETL		
Warranty	Limited Lifetime		

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA			
Fan Diameter	42 inch / 107 cm	52 inch / 132 cm	60 inch / 152 cm
RPM (Low/High)	53 / 235	51 / 202	51 / 152
CFM (Low/High)	941 / 5101	1692 / 7389	2454 / 8251
Watts (High)	20.37	32.61	32.58
CFM/Watt (High)	213	220	256
Blade Pitch	15°	15°	15°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control




ACCESSORY 60° cathedral ceiling canopy

NOTE: Only compatible with included controllers.

Blade Options




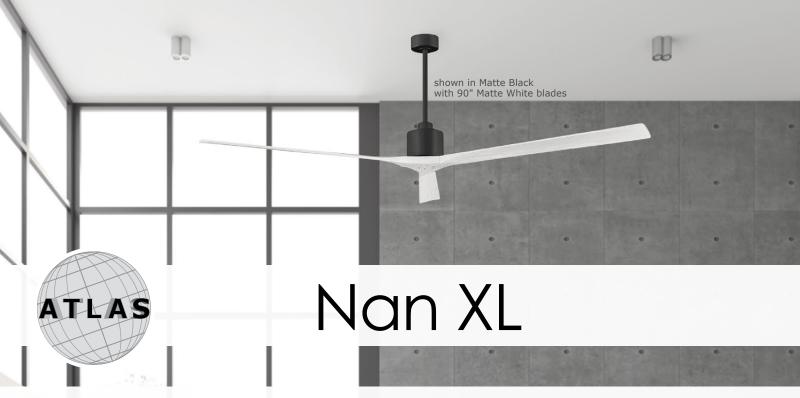

Designed by Chicago architect Stephen Katz, the Nan XL ceiling fan is a revolutionary take on ceiling fans, incorporating traditional design with superior performance and functionality to meet the aesthetic needs and challenges of any space. The Nan XL fan feels at home in any setting from casual to commercial and everything in between. This timeless ceiling fan works in residential environments, restaurants, hospitality or even office settings. The Nan XL fan has the perfect amount of design presence for any size room or season. The fully adjustable fan motor speeds makes moving the right amount of air simple and easy. The Nan XL fan will feel like a natural part of the room and enhance any space with a fresh breeze. Also available is the standard Nan fan with smaller diameter options: 42", 52" and 60".





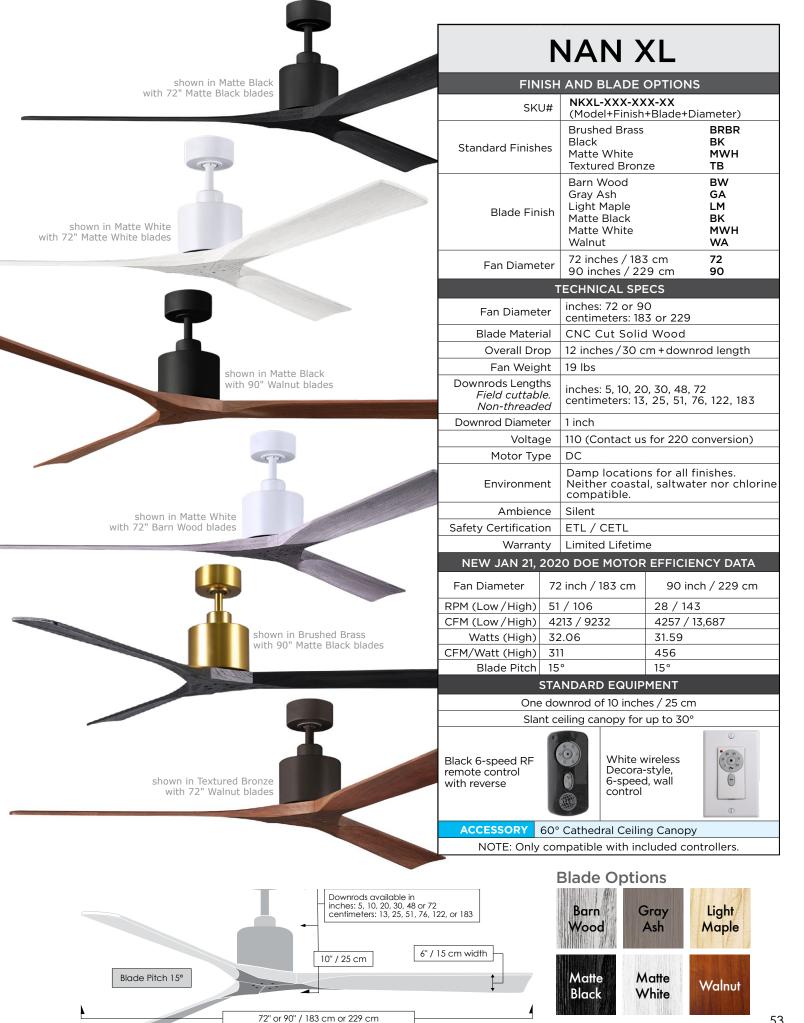



A complement to any commercial or residential space, the Patrícia-3 seamlessly combines innovation with simple, refined design. Its elegant aesthetic belies its robust construction. Solid wood walnut, matte black, matte white, or barn wood tone blades revolve around a balanced, cylindrical DC motor housing. Air is circulated efficiently with barely more than a whisper. An eco-conscious LED light kit completes the package, making Patrícia-3 sophisticated, efficient and green. Constructed of cast aluminum and heavy stamped steel, the Patrícia-3 carries a limited lifetime warranty.

Product Features























PATRÍCIA-3

FINISH AND BLADE OPTIONS		
SKU#	PA3-XX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Brushed Brass Brushed Nickel Polished Chrome Textured Bronze Gloss White Matte Black	BRBR BN CR TB WH BK
Blade Finishes	Barn Wood Tone Matte Black Matte White Walnut Tone	BW BK MWH WA
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60

TECHNICAL SPECS		
Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152	
Blade Material	CNC Cut Solid Wood	
Overall Drop	14 inches/36 cm + downrod length	
Fan Weight	19 lbs	
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	1 inch	
Voltage	110 or 220	
Motor Type	DC	
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Silent	
Safety Certification	ETL / CETL	
Warranty	Limited Lifetime	

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA 42 inch / 107 cm 52 inch / 60 inch / Fan Diameter 132 cm 152 cm RPM (Low/High) 52 / 232 51 / 219 51 / 156 CFM (Low/High) 860 / 4286 2113 / 6833 1283 / 6077 Watts (High) 16.60 32.03 31.72 CFM/Watt (High) 211 182 219 Blade Pitch 15° 15° 15°

LIGHT KIT PHOTOMETRICS		
Lamping (Replaceable)	Integrated LED	
Remote Dimmable	Yes	
Delivered Temperature in K	3075	
Delivered Lumens	690	
CRI	90	
Watts	16	
Hours	60,000	

Light kit longevity if used 6 Hours/Day: 27.4 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Light cover

Black 6-speed RF remote control with reverse




White wireless Decora-style, 6-speed, wall control



ACCESSORY

60° cathedral ceiling canopy

NOTE: Only compatible with included controllers.

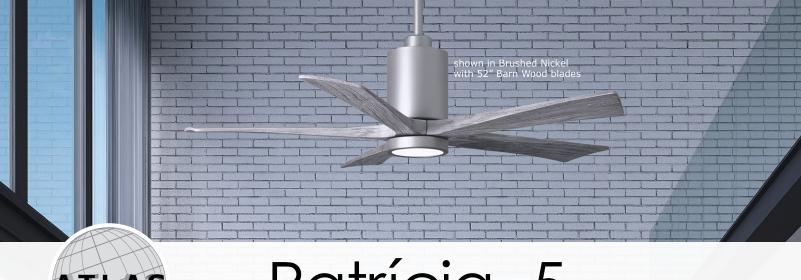

Patrícia-5 ATLAS



A complement to any commercial or residential space, the Patrícia-5 seamlessly combines innovation with simple, refined design. Its elegant aesthetic belies its robust construction. Solid wood walnut, matte black, matte white, or barn wood tone blades revolve around a balanced, cylindrical DC motor housing. Air is circulated efficiently with barely more than a whisper. An eco-conscious LED light kit completes the package, making Patrícia-5 sophisticated, efficient and green. Constructed of cast aluminum and heavy stamped steel, the Patrícia-5 carries a limited lifetime warranty.

Product Features





















Silent



PATRÍCIA-5

FINISH AND BLADE OPTIONS		
SKU#	PA5-XX-XXX-XX (Model+Finish+Blade+Dia	ameter)
Standard Finishes	Brushed Brass Brushed Nickel Polished Chrome Textured Bronze Gloss White Matte Black	BRBR BN CR TB WH BK
Blade Finishes	Barn Wood Tone Matte Black Matte White Walnut Tone	BW BK MWH WA
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60

TECHNICAL SPECS		
Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152	
Blade Material	CNC Cut Solid Wood	
Overall Drop	14 inches/36 cm +downrod length	
Fan Weight	19 lbs	
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	1 inch	
Voltage	110 or 220	
Motor Type	DC	
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Silent	
Safety Certification	ETL / CETL	
Warranty	Limited Lifetime	

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA			
Fan Diameter	42 inch / 107 cm	52 inch / 132 cm	60 inch / 152 cm
RPM (Low/High)	53 / 221	51 / 186	51 / 87
CFM (Low/High)	917 / 4386	1398 / 5524	3247 / 5547
Watts (High)	30.47	31.80	31.64
CFM/Watt (High)	137	170	194
Blade Pitch	15°	15°	15°

LIGHT KIT PHOTOMETRICS		
Integrated LED		
Yes		
3075		
690		
90		
16		
60,000		

Light kit longevity if used 6 Hours/Day: 27.4 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Light cover

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control with reverse



ACCESSORY

60° cathedral ceiling canopy

NOTE: Only compatible with included controllers.



The Super Janet's remarkable design and solid construction in cast aluminum and heavy stamped steel make it the heroine in any commercial or residential space. Moving air with barely a whisper, its efficient DC motor turns solid wood blades in walnut, matte black, matte white, or barn wood tones. An ecoconscious LED light kit with light cover completes the package. Sophisticated, efficient and green, Super Janet carries a limited lifetime warranty.

Product Features























SUPER JANET

FINISH AND BLADE OPTIONS		
SKU#	SJ-XX-XXX-XX (Model+Finish+Blade+Dia	ameter)
Standard Finishes	Brushed Nickel Gloss White Matte Black Textured Bronze	BN WH BK TB
Blade Finishes	Barn Wood Tone Matte Black Matte White Walnut Tone	BW BK MWH WN
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60
TECHNICAL SPECS		

TECHNICAL SPECS		
Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152	
Blade Material	CNC Cut Solid Wood	
Overall Drop	12 inches/30 cm + downrod length	
Fan Weight	17 lbs	
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	1 inch	
Voltage	110 (Contact us for 220 conversion)	
Motor Type	DC	
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Silent	
Safety Certification	ETL / CETL	
Warranty	Limited Lifetime	

NEW JAIN 21, 2020 DOE MOTOR EFFICIENCT DATA			
Fan Diameter	42 inch / 107 cm*	52 inch / 132 cm*	60 inch / 152 cm
RPM (Low/High)	50 / 242	50 / 184	50 / 150
CFM (Low/High)	915 / 4530	1571 / 5962	2293 / 6495
Watts (High)	23.62	32.99	33.32
CFM/Watt (High)	173	180	205
Blade Pitch	15°	15°	15°

NEW IAN 21 2020 DOE MOTOR FEEICIENCY DATA

LIGHT KIT PHOTOMETRICS		
Lamping (Replaceable)	Integrated LED	
Remote Dimmable	Yes	
Delivered Temperature in K	2776	
Delivered Lumens	419	
CRI	94	
Watts	18	
Hours	50,000	

Light kit longevity if used 6 Hours/Day: 22.8 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm Vaulted ceiling canopy for up to 30°

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control



ACCESSORY 60° cathedral ceiling canopy

*Unipack Shipping for 42"and 52" in diameters only.



The Ar Ruthiane's unique hourglass support arms grasp bullet-shaped motor housings which rotate 360° about its teardrop center. The fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Ar Ruthiane carries a limited lifetime warranty.



























AR RUTHIANE

FINISH AND BLADE OPTIONS		
SKU#	AR-XXXXXX-XXX (Model+Finish+Blade)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order Finishes	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira	BRBR BRCP PB CR CP CRDAMP BNDAMP WH LTBLUE LTPURPLE BKN GREEN GOLD BLUE
Fan Blade	Solid Mahogany Wood Blade Metal Blade	WD MTL
TECHNICAL SPECS		

Voltage	110 or 220
Motor Type	AC
Rotation	Yes
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	.75 inch
Overall Drop	12 inches / 30 cm + downrod length
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime

21 lbs

Fan Weight

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		
Fan Head Options	Solid Mahogany Wood	Metal with Guard
Fan Diameter	48 inches / 122 cm	46 inches / 117 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	723 / 1308	591 / 1075
CFM (Low / High)	2644 / 4724	1215 / 2371
Watts (High)	96.94	103.53
CFM/Watt (High)	48.73	22.90
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm Flat ceiling canopy Decora-style, 3-speed wall control in white

OPTIONAL EQUIPMENT 29° vaulted ceiling mount and canopy



Special Order Finishes







Optimum Fan Head Position is 60°















Standard Finishes







Brushed Brass

Polished **Brass**

Brushed Copper

Polished Copper

Polished Chrome

Polished Chrome Damp

Brushed Nickel Damp

Gloss White



Unique and versatile, the fan head of the Bianca Direcional ceiling fan can be infinitely positioned in a 180-degree arc, forward and reverse, to provide maximum, directional airflow. The Bianca can be hung in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any room. Constructed of cast aluminum, heavy spun and stamped steel, the Bianca Directional carries a limited lifetime warranty.























BIANCA **DIRECIONAL**

FINISH AND BLADE OPTIONS

FINISH AND BLADE OF HONS		
SKU#	BD-XXXXXX-XX (Model+Finish+Blade)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Chrome Damp Brushed Nickel Damp Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira	BRBR BRCP PB CR CP CRDAMP BNDAMP WH LTBLUE LTPURPLE BKN GREEN GOLD RED BLUE
Fan Blade	Solid Mahogany Wood Blade Metal Blade	WD MTL

TECHNICAL SPECS			
Fan Weight	7 lbs		
Voltage	110 or 220		
Motor Type	AC	AC	
Oscillation	No		
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30 centimeters: 13, 25, 51, 76		
Downrod Diameter	.75 inch		
Overall Drop	Metal Blades:	13 inches / 33 cm + downrod length	
	Wood Blades:	16 inches / 41 cm + downrod length	
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.		
Ambience	Soothing White Noise		

UL / CUL

Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		
Fan Head Options	Solid Mahogany Wood	Metal with Guard
Fan Diameter	16 inches / 41 cm	13 inches / 33 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	926 / 1280	615 / 1149
CFM (Low / High)	1568 / 2274	814 / 1199
Watts (High)	47.46	49.00
CFM/Watt (High)	47.91	24.47
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Flat ceiling canopy (Not compatible with vaulted ceiling canopy)

Decora-style, 3-speed wall control in white





Brushed

Brass



Polished

Brass



Brushed

Copper





Polished

Copper



Polished

Chrome





Polished Chrome Damp







Safety Certification

Warranty





Standard Finishes

Brushed Nickel





Brisa 2000



Like satellites orbiting a planet, the Brisa's select mahogany blade head and lunar counterweight gently revolve 360° about its spherical gear housing. The fan head can be infinitely positioned in a 180-degree arc for optimum air movement; the greater the angle of the motor to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Brisa carries a limited lifetime warranty.























Product Features



BRISA 2000

FINISH AND BLADE OPTIONS		
SKU#	B2K-XXXXXX-XXX (Model+Finish+Blade)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira	BRBR BRCP PB CR CP CRDAMP BNDAMP WH LTBLUE LTPURPLE BKN GREEN GOLD RED BLUE
Fan Blade	Solid Mahogany Wood Blade Metal Blade	WD MTL
TECHNICAL SPECS		
Fan Weight	21 lbs	
Voltage	110 or 220	
Motor Type	AC	
Rotation	Yes	

Field cuttable. Non-threaded	centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	.75 inch	
Overall Drop	10 inches / 25 cm + downrod length	
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White Noise	
afety Certification	UL / CUL	
Warranty	Limited Lifetime	
NEW JAN 21. 2020 DOE MOTOR EFFICIENCY DATA		

inches: 5, 10, 20, 30, 48, 72

Downrods Lengths

Field cuttable.

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		
Fan Head Options	Solid Mahogany Wood*	Metal with Guard
Fan Diameter	40 inches /102 cm	39 inches/99 cm
Fan Blade Diameter	16 inches/41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	866 / 1336	790 / 1205
CFM (Low / High)	1602 / 2376	790 / 1265
Watts (High)	52.44	55.15
CFM/Watt (High)	45.31	22.94
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm Flat ceiling canopy

Decora-style, 3-speed wall control in white

OPTIONAL EQUIPMENT

29° vaulted ceiling mount and canopy NOTE: *Unipack Shipping for Wood Blades only

Special Order Finishes



Brushed

Brass



Polished

Brass



Brushed

Copper



Polished

Copper



Polished

Chrome
















Polished Chrome Damp Brushed Nickel Damp White







The Bruna Parede is reminiscent of the wall fans of the early 20th century. The fan head of the Bruna Parede wall mounted fan can be infinitely positioned vertically and horizontally across 180-degree arcs to provide maximum directional airflow. It can be mounted in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any space. Constructed of cast aluminum, heavy spun and stamped steel, the Bruna Parede carries a limited lifetime warranty.




























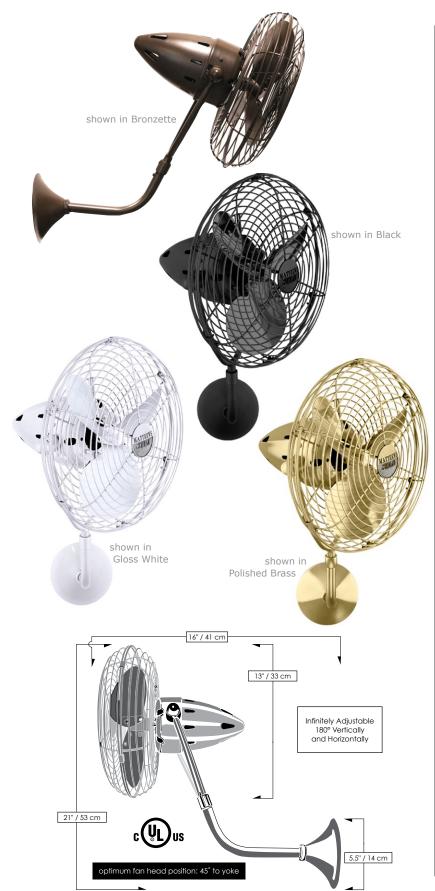

BRUNA PAREDE

FINISH	AND BLADE OPTIONS	
SKU#	BP-XXXXXX (Model+Finish)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira	BRBR BRCP PB CR CP CRDAMP BNDAMP WH LTBLUE LTPURPLE BKN GREEN GOLD RED BLUE
TECHNICAL SPECS		
Fan Weight	8 lbs	
Blade Material	Metal	

Blade Material	Metal
Voltage	110 or 220
Motor Type	AC
Oscillation	No
Fan Diameter	13 inches / 33 cm
Fan Height	21 inches / 51 cm
Fan Projection	16 inches / 41 cm
Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling
Fan Guard	Safety Cage
Environment	Damp location with powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		
RPM (Low / High)	1021 / 1418	
CFM (Low / High)	839 / 1181	
Watts (High)	49.00	
CFM/Watt (High)	24.01	
Blade Pitch	310	

STANDARD EQUIPMENT
Safety cage
Side-mounted wall junction box
Decora-style, 3-speed wall control in white



Special Order Finishes



Brushed

Brass



Polished

Brass



Brushed

Copper



Polished Copper





Polished Chrome





Polished Chrome Damp









Standard Finishes







Few designs can match the timeless and sophisticated aesthetic of the Duplo-Dinamico 360° rotational fan. Other manufacturers have tried to reproduce this unique design, though all have proven to be of lesser quality and durability. The fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Duplo carries a limited lifetime warranty.

Product Features



























DUPLO-DINAMICO

AND BLADE OPT	IONS	
DD-XXXXXXX-XXX (Model+Finish+Bla		
Black Bronzette Brushed Nickel	BK BZZT BN	
Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Chrome I Brushed Nickel Da Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira		
Solid Mahogany Wood Blade Metal Blade	WD MTL	
TECHNICAL SPECS		
21 lbs		
110 or 220		
AC		
Yes		
inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183		
.75 inch		
9 inches / 23 cm +	downrod length	
Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.		
Soothing White Noise		
UL / CUL		
Warranty Limited Lifetime		
DOE MOTOR EFF	FICIENCY DATA	
Solid Mahogany Wood*	Metal with Guard	
36 inches / 91 cm	39 inches/99 cm	
16 inches / 41 cm	13 inches / 33 cm	
No Cage Option	Decorative Cage or Safety Cage with tight tines	
	DD-XXXXXX-XXX (Model+Finish+Bia Black Bronzette Brushed Nickel Brushed Brass Brushed Copper Polished Chrome I Brushed Nickel Da Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira Solid Mahogany Wood Blade Metal Blade CHNICAL SPECS 21 lbs 110 or 220 AC Yes inches: 5, 10, 20, 3 centimeters: 13, 25 .75 inch 9 inches / 23 cm + Damp location wi powder or clear of coastal, saltwater compatible. Soothing White N UL / CUL Limited Lifetime DOE MOTOR EFF Solid Mahogany Wood* 36 inches / 91 cm 16 inches / 41 cm	

RPM (Low / High) 1274 / 1534 598 / 1109 CFM (Low / High) 2673 / 3210 1240 / 2274 103.35 Watts (High) 74.06 CFM/Watt (High) 43.34 22.00 Blade Pitch 19° 31°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Flat ceiling canopy

Decora-style, 3-speed wall control in white

OPTIONAL EQUIPMENT

29° vaulted ceiling mount and canopy

NOTE: *Unipack Shipping for Wood Blades only

Special Order Finishes



Brushed

Brass



Polished

Brass



Brushed

Copper



Polished

Copper





Polished

Chrome



Polished Chrome Damp





Brushed Nickel Damp



Gloss

White

Standard Finishes











The Italo Ventania is the largest 360° rotational fan in the Matthews Fan Co collection. Its vortex sculpted arms grasp also remarkable, side-mounted fan heads in gentle, equatorial rotation. The fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angle of the motor to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Ar Ruthiane carries a limited lifetime warranty.













Product Features












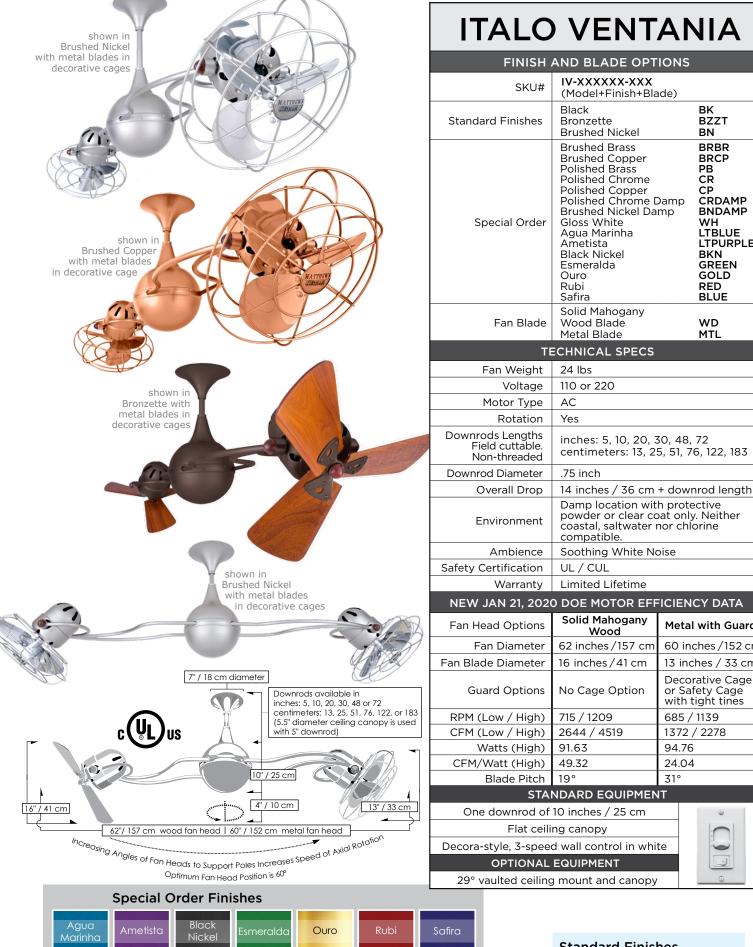

Standard Finishes



Brushed Nickel

White

Polished

Chrome

Polished

Chrome

Brushed

Brass

Polished

Brass

Brushed

Copper

Polished

Copper



BK

BN

PB

CR

CP

WH

BKN

BZZT

BRBR

BRCP

CRDAMP

BNDAMP

LTPURPLE

LTBLUE

GREEN

GOLD

RED

WD

MTL

Metal with Guard

60 inches /152 cm

13 inches / 33 cm

Decorative Cage

or Safety Cage

with tight tines

685 / 1139

1372 / 2278

94.76

24.04

31°

BLUE



Unique and versatile, the fan head of the Jarold Direcional ceiling fan can be infinitely positioned in a 180-degree arc, forward and reverse, to provide maximum, directional airflow. The Jarold can be hung in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any room. Constructed of cast aluminum, heavy spun and stamped steel, the Jarold Direcional carries a limited lifetime warranty.




























The Michelle Parede is reminiscent of wall fans of the early 20th century. The fan head of the Michelle Parede wall mounted fan can be infinitely positioned vertically and horizontally across 180 - degree arcs to provide maximum directional airflow. It can be mounted in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any space. Constructed of cast aluminum, heavy spun and stamped steel, the Michelle Parede carries a limited lifetime warranty.
























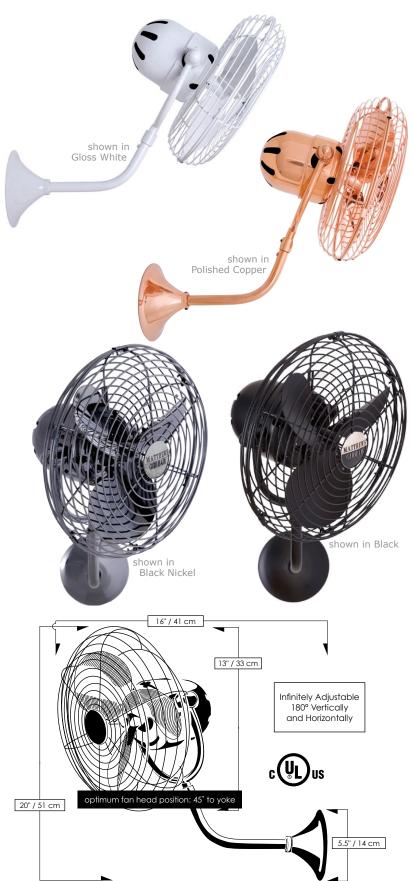

MICHELLE PAREDE

FINISH AND BLADE OPTIONS		
SKU#	MP-XXXXXX (Model+Finish)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Chrome Damp Brushed Nickel Damp Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira	BRBR BRCP PB CR CP CRDAMP BNDAMP WH LTBLUE LTPURPLE BKN GREEN GOLD RED BLUE
TECHNICAL SPECS		


8 lbs

Fan Weight

Blade Pitch

Gloss White 31°

Blade Material	Metal	
Voltage	110 or 220	
Motor Type	AC	
Oscillation	No	
Fan Diameter	13 inches / 33 cm	
Fan Height	20 inches / 51 cm	
Fan Projection	16 inches / 41 cm	
Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling	
Fan Guard	Safety Cage	
Environment	Damp location with powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White Noise	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	
NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		
RPM (Low / High)	1020 / 1418	
CFM (Low / High)	838 / 1181	
Watts (High)	49.00	
CFM/Watt (High)	24.01	















Vent-Bettina



The Vent-Bettina 360° rotational fan is thoughtfully designed with its arms gently upward curving. The fan offers fluid lines and quiet axial rotation with motor heads which can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Vent-Bettina carries a limited lifetime warranty.























VENT-BETTINA

FINISH AND BLADE OPTIONS			
SKU#	VB-XXXXXX-XXX (Model+Finish+Blade)		
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN	
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Chrome Damp Brushed Nickel Damp Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira	BRBR BRCP PB CR CP CRDAMP BNDAMP WH LTBLUE LTPURPLE BKN GREEN GOLD ROLD BLUE	
Fan Blade	Solid Mahogany Wood Blade Metal Blade	WD MTL	
TECHNICAL SPECS			
Fan Weight	19 lbs		

TECHNICAL SPECS		
Fan Weight	19 lbs	
Voltage	110 or 220	
Motor Type	AC	
Rotation	Yes	
Downrods Lengths Field cuttable. Non-threaded	inches: 10, 20, 30, 48, 72 centimeters: 25, 51, 76, 122, 183	
Downrod Diameter	.75 inch	
Overall Drop	7 inches / 18 cm + downrod length	
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White Noise	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	
NEW IAN 21 2020 DOE MOTOR EFFICIENCY DATA		

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA			
Fan Head Options	Solid Mahogany Wood	Metal with Guard	
Fan Diameter	44 inches /112 cm	42 inches /107 cm	
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm	
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines	
RPM (Low / High)	796 / 1252	699 / 1101	
CFM (Low / High)	2070 / 3293	1346 / 2077	
Watts (High)	87.32	89.63	
CFM/Watt (High)	37.71	23.17	
Blade Pitch	19°	31°	

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm Flat ceiling canopy

Decora-style, 3-speed wall control in white

OPTIONAL EQUIPMENT

29° vaulted ceiling mount and canopy



Special Order Finishes



Brushed

Brass



Polished

Brass



Brushed

Copper













Standard Finishes











