

shown in Polished Copper with
metal blades and safety cage



Jarold Direcional

Designed in 2007



Unique and versatile, the fan head of the Jarold Direcional ceiling fan can be infinitely positioned in a 180-degree arc, forward and reverse, to provide maximum, directional airflow. The Jarold can be hung in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any room. Constructed of cast aluminum, heavy spun and stamped steel, the Jarold Direcional carries a limited lifetime warranty.

Product Features



American
Labor



Hand
Made



AC
Motor



180°
Adjustable



Safety Cage
Compatible



Damp
Location



Soothing
White Noise



Wall
Control



Unipack
Shipping

JAROLD DIRECIONAL

FINISH AND BLADE OPTIONS

SKU#	JD-XXXXXX-XX (Model+Finish+Blade)	
Standard Finishes	Black	BK
	Bronzette	BZZT
Special Order	Brushed Nickel	BN
	Brushed Brass	BRBR
	Brushed Copper	BRCP
	Polished Brass	PB
	Polished Chrome	CR
	Polished Copper	CP
	Polished Chrome Damp	CRDAMP
	Brushed Nickel Damp	BNDAMP
	Gloss White	WH
	Agua Marinha	LTBLUE
	Ametista	LTPURPLE
	Black Nickel	BKN
	Esmeralda	GREEN
	Ouro	GOLD
	Rubi	RED
	Safira	BLUE
Fan Blade	Solid Mahogany	WD
	Wood Blade Metal Blade	MTL

TECHNICAL SPECS

Fan Weight	7 lbs	
Voltage	110 or 220	
Motor Type	AC	
Oscillation	No	
Downrods Lengths <i>Field cuttable. Non-threaded</i>	inches: 5, 10, 20, 30 centimeters: 13, 25, 51, 76	
Downrod Diameter	.75 inch	
Overall Drop	Metal Blades:	13 inches / 33 cm + downrod length
	Wood Blades:	16 inches / 41 cm + downrod length
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White Noise	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Head Options	Solid Mahogany Wood	Metal with Guard
Fan Diameter	16 inches / 41 cm	13 inches / 33 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	955 / 1318	615 / 1149
CFM (Low / High)	1701 / 2368	800 / 1162
Watts (High)	46.77	48.39
CFM/Watt (High)	50.63	24.01
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm
Flat ceiling canopy (Not compatible with vaulted ceiling canopy)
Decora-style, 3-speed wall control in white



Special Order Finishes

Agua Marinha	Ametista	Black Nickel	Esmeralda	Ouro	Rubi	Safira
Brushed Brass	Polished Brass	Brushed Copper	Polished Copper	Polished Chrome	Polished Chrome Damp	Brushed Nickel Damp
Gloss White						

Standard Finishes

Matte Black	Bronzette (Powdercoat)	Brushed Nickel
-------------	------------------------	----------------

shown in
Polished Copper
with wood blades

shown in
Brushed Nickel
with metal blades
in decorative cage

shown in
Gloss White
with wood blades

shown
in Polished Brass
with Metal blades
in safety cage

shown in
Black with
metal blades
in safety cage


shown
in Brushed Copper
with Wood blades

shown
in Black Nickel
with Wood blades

shown in Black with
metal blades in safety cage

Jarold Direcional

TECHNICAL SPECIFICATIONS

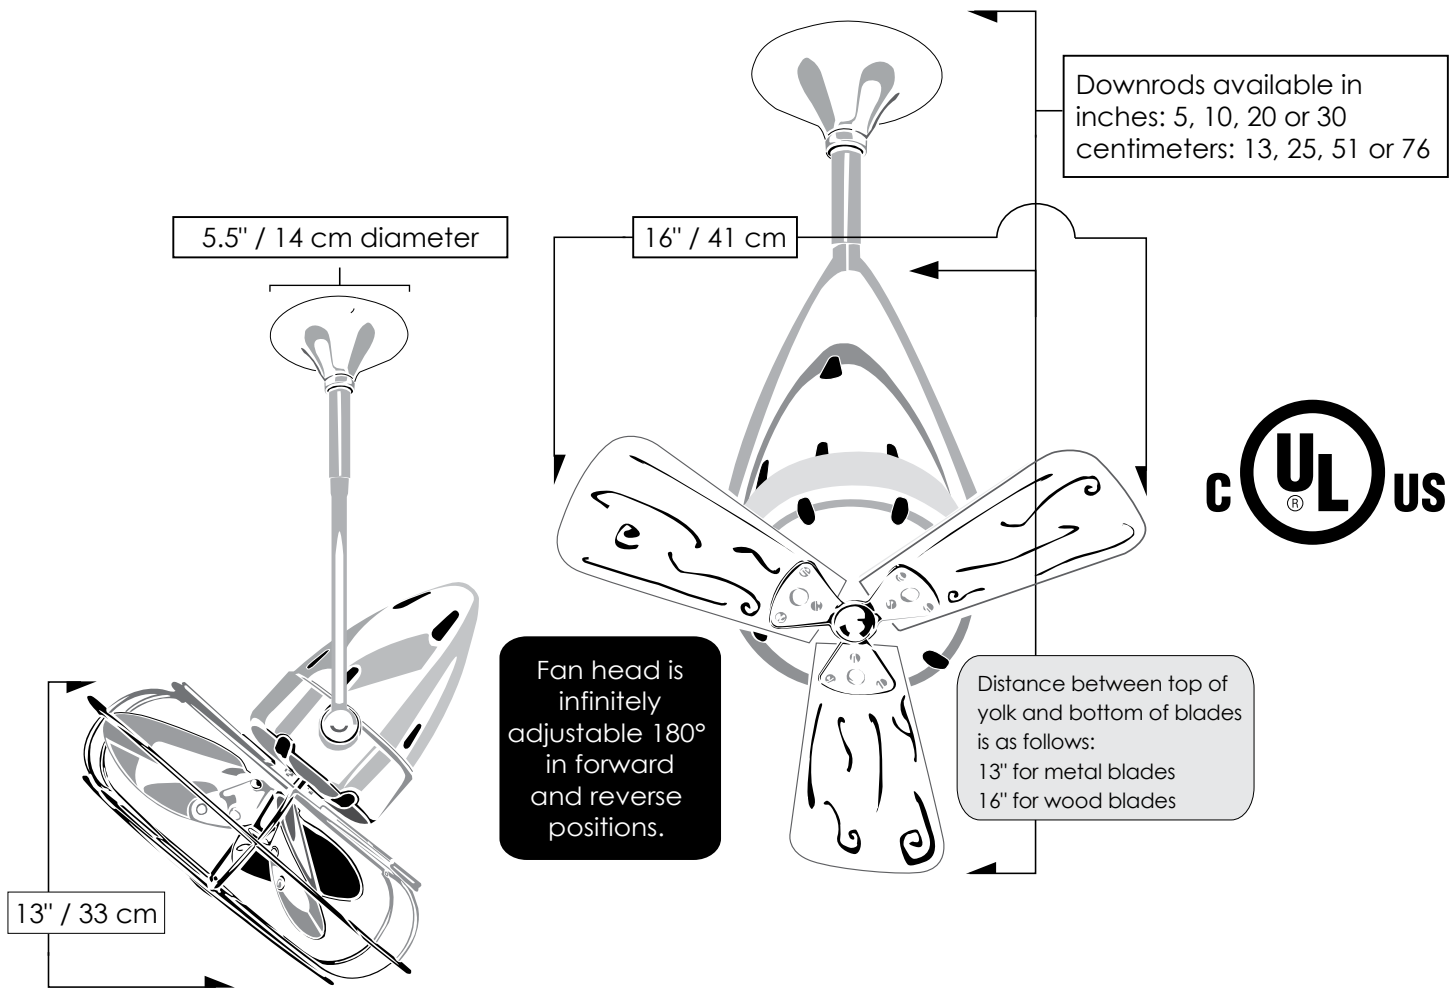

CEILING PITCH TABLE

0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

CEILING HEIGHT / DOWNROD TABLE

Ceiling Height	Downrod Lengths <i>Field cuttable. Non-threaded</i>
10 ft or less	5 inches / 13 cm <i>Use safety cages if applicable</i>
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm

Matthews Fan Company

1881 Industrial Drive
Libertyville, IL 60048
Tele: 847.680.9043
Fax: 847.680.8140
www.matthewsfanco.com

© 2023 Matthews Fan Company. All rights reserved.

