

Unique and versatile, the fan head of the Bianca Direcional ceiling fan can be infinitely positioned in a 180-degree arc, forward and reverse, to provide maximum, directional airflow. The Bianca can be hung in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any room. Constructed of cast aluminum, heavy spun and stamped steel, the Bianca Direcional carries a limited lifetime warranty.





















Product Features



BIANCA DIRECIONAL

		1/76		
FINISH	AND BLADE O	PTIONS		
SKU#	BD-XXXXXX-XX (Model+Finish+Blade)			
Standard Finishes	Black Bronzette Brushed Nickel		BK BZZT BN	
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira		BRBR BRCP PB CR CRDAMP BNDAMP WH LTBLUE LTPURPLE BKN GREEN GOLD RED BLUE	
Fan Blade	Solid Mahogany Wood Blade Metal Blade	,	WD MTL	
TECHNICAL SPECS				
Fan Weight	7 lbs			
Voltage	110 or 220			
Motor Type	AC			
Oscillation	No			
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30 centimeters: 13, 25, 51, 76			
Downrod Diameter	.75 inch			
Overall Drop	Metal Blades:	+ down	es / 33 cm rod length es / 41 cm	
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.			
٠ ا - ا - ا - ا	C = = + = :-= =: \ \ \ / = :+=	KI - 1		

	NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA				
Fan Head Options		Solid Mahogany Wood	Metal with Guard		
	Fan Diameter	16 inches / 41 cm	13 inches / 33 cm		
	Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm		
	Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines		
	RPM (Low / High)	926 / 1280	615 / 1149		
	CFM (Low / High)	1568 / 2274	814 / 1199		
	Watts (High)	47.46	49.00		
	CFM/Watt (High)	47.91	24.47		
	Blade Pitch	19°	31°		

UL / CUL

Limited Lifetime

Soothing White Noise

2020 DOE MOTOR EFFICIENCY DATA

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Safety Certification

Ambience

Warranty

Flat ceiling canopy (Not compatible with vaulted ceiling canopy) Decora-style, 3-speed wall control in white





Brushed

Brass

Polished

Brass



Brushed

Copper



Polished Copper





Polished Chrome



Polished

Chrome

Damp





Brushed Nickel Damp



Standard Finishes








Bianca Direcional

TECHNICAL SPECIFICATIONS

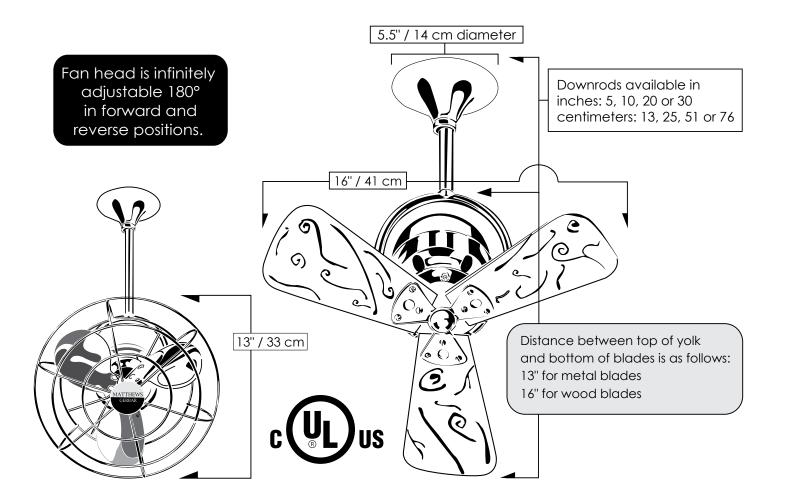

CEIL	CEILING PITCH TABLE		
0/12	0 degrees		
1/12	4.76 degrees		
2/12	9.46 degrees		
3/12	14.04 degrees		
4/12	18.43 degrees		
5/12	22.62 degrees		
6/12	26.57 degrees		
7/12	30.26 degrees		
8/12	33.69 degrees		
9/12	36.87 degrees		
10/12	39.81 degrees		
11/12	42.51 degrees		

CEILING	HEIGHT / DOWNROD TABLE
Ceiling Height	Downrod Lengths Field cuttable. Non-threaded
10 ft or less	5 inches / 13 cm Use safety cages if applicable
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm

Matthews Fan Company

1881 Industrial Drive Libertyville, IL 60048 Tele: 847.680.9043 Fax: 847.680.8140 www.matthewsfanco.com

